



Temperature converter, loop-powered - isolated

3331

- Excellent accuracy, better than 0.05% of span
- Slimline housing of 6 mm
- Excellent EMC performance and 50/60 Hz noise suppression
- Selectable < 30 ms / 300 ms response time
- Pre-calibrated temperature ranges selectable via DIP-switches



Application

- The 3331 temperature converter measures a standard Pt100, TC J and K temperature sensor, and provides an isolated passive analog current output signal.
- High 2 port isolation provides surge suppression and protects the control system from transients and noise.
- The 3331 can be mounted in the safe area or in Zone 2 / Division 2 areas.
- Approved for marine applications.


Technical characteristics

- Flexibly loop powered by 5.5...35 VDC via connectors.
- < 30 ms fast response time with simultaneous sensor error detection when selected.
- Selectable 300 ms response time when signal dampening is needed.
- Selectable internal/external CJC.
- Excellent conversion accuracy in all available ranges, better than 0.05% of span.
- Meeting the NAMUR NE21 recommendations, the 3331 provides top measurement performance in harsh EMC environments.
- The device meets the NAMUR NE43 standard defining out of range and sensor error output values.
- All terminals are protected against overvoltage and polarity error.
- High galvanic isolation of 2.5 kVAC.
- Excellent signal/noise ratio of > 60 dB.


Mounting / installation / programming

- Selectable DIP-settings for easy configuration of more than 1000 factory calibrated measurement ranges.
- The narrow 6 mm housing allows up to 165 units to be mounted per meter of DIN rail, without any air gap between units.
- Wide ambient temperature range of -25...+70°C.

Connections

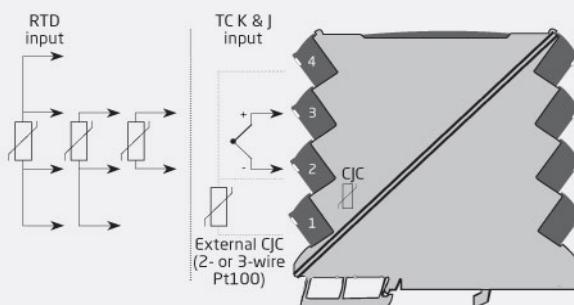

*Safe Area or
Zone 2 & Cl. 1, Div. 2, gr. A-D*

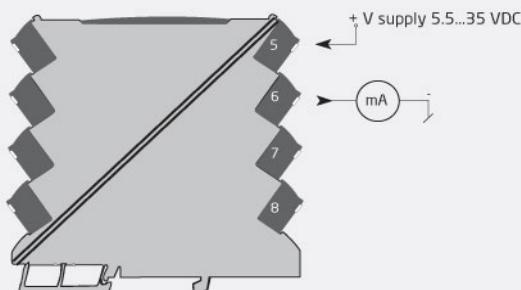

Order:

Type
3331

Environmental Conditions

Specifications range.....	-25°C to +70°C
Storage temperature.....	-40°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & measurement / overvoltage cat. II

Mechanical specifications

Dimensions (HxWxD).....	113 x 6.1 x 115 mm
Weight approx.....	70 g
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13 x 2.5 mm ² / AWG 26...12 stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6 : 2007
Vibration: 2...25 Hz.....	±1.6 mm
Vibration: 25...100 Hz.....	±4 g

Common specifications

Supply

Supply voltage..... 5.5...35 VDC

Isolation voltage

Isolation voltage, test / working..... 2.5 kVAC / 300 VAC (reinforced)
Zone 2 / Div. 2..... 250 VAC

Response time

Response time (0...90%, 100...10%)..... < 30 ms / 300 ms (selectable)
Voltage drop..... 5.5 VDC
Internal consumption..... 19 mW...0.8 W
Signal / noise ratio..... > 60 dB
Programming..... DIP-switches
Signal dynamics, input..... 23 bit
Signal dynamics, output..... 18 bit
EMC immunity influence..... < ±0.5% of span
Extended EMC immunity: NAMUR NE 21, A criterion, burst..... < ±1% of span
Incorrect DIP-switch setting identification..... 3.5 mA

Input specifications

RTD input

Temperature range, Pt100..... -200...+850°C
Min. measurement range (span)..... 10°C
Accuracy: the greater of..... Better than 0.05% of span or 0.1°C
Temperature coefficient: the greater of..... 0.02°C/°C or ≤ ±0.01%/°C
Sensor current..... < 150 µA
Sensor cable resistance..... < 50 Ω per wire
Effect of sensor cable resistance (3-/4-wire)..... < 0.002 Ω / Ω
Sensor error detection..... Yes - selectable via DIP-switch
Broken sensor detection..... > 800 Ω
Shorted sensor detection..... < 18 Ω

TC input

Temperature range, TC J..... -100...+1200°C
Temperature range, TC K..... -180...+1372°C

Min. measurement range (span)

- TC J & K..... 50°C
Accuracy: the greater of..... Better than 0.05% of span or 0.5°C

Temperature coefficient: the greater of..... 0.1°C/°C or ≤ ±0.01%/°C

Sensor cable resistance..... < 5 kΩ per wire

Cold junction compensation (CJC): Accuracy @ external Pt100 input..... Better than ±0.15°C

Cold junction compensation (CJC): Accuracy @ internal CJC..... Better than ±2.5°C

Open Thermocouple detection..... Yes - selectable via DIP-switch

Internal CJC error detection..... Yes

External CJC error detection..... Yes - selectable via DIP-switch

Output specifications

Current output

Programmable signal ranges..... 4...20 and 20...4 mA
Load (@ current output)..... ≤ (V_{supply} - 5.5) / 0.023 [Ω]
Load stability..... ≤0.01% of span / 100 Ω

Common output specifications

Updating time..... 10 ms
Range limits..... 3.8...20.5 mA NAMUR NE43
Sensor error indication..... 3.5 mA or 23 mA / acc. to NAMUR NE43 or OFF

Observed authority requirements

EMC..... 2014/30/EU
LVD..... 2014/35/EU
RoHS..... 2011/65/EU

Approvals

ATEX 2014/34/EU..... KEMA 10ATEX0147 X, II 3 G
Ex nA IIC T4 Gc
IECEx..... KEM 10.0068X
FM..... 3041043-C
DNV Marine..... Stand. f. Certific. No. 2.4
GL..... V1-7-2
EAC..... TR-CU 020/2011
UL..... UL 61010-1